


PRODUCT SPECIFICATION

<b>MAIN MATERIAL:</b>	Aluminium	<b>CLASS:</b>	CE (Class II)
<b>RAL:</b>	9003 (White) / 7021 (Black)	<b>IP RATING:</b>	20
<b>DIMENSIONS:</b>	1053x64x1950	<b>VOLTAGE:</b>	Mains 230V
<b>CABLE LENGTH:</b>	2M	<b>WORKING TEMPERATURE</b>	-20°C ~ 45°C
<b>NET WEIGHT:</b>	11,3Kg	<b>DRIVER</b>	Longbright (included)
<b>F MARK</b>	Suitable for mounting on flammable materials	<b>POWER FACTOR</b>	≥0.9

<b>LIGHT SOURCE:</b>	LED STRIP (Samsung 2835)	<b>MACADAM</b>	Step3
<b>LAMP INCLUDED?</b>	YES	<b>UGR</b>	<6
<b>LUMINOUS FLUX:</b>	↑ 7150lm / 3250lm ↓	<b>LB (on 100.000hrs)</b>	L80B10
<b>INPUT POWER:</b>	↑ 60W / 20W ↓	<b>CRI</b>	80
<b>COLOUR TEMP:</b>	From 3000 to 6000k (CCT)	<b>FLICKER FREE</b>	YES
<b>DIMMABLE</b>	YES	<b>BEAM ANGLE</b>	50°
<b>PHOTOBIOLOGICAL GROUP</b>	0 (No Risk)		

<b>MOTION SENSOR</b>	YES		
<b>DAYLIGHT SENSOR</b>	YES		
<b>DAYLIGHT SENSOR AREA</b>	≤85°		
<b>CONTROL</b>	Touch panel		

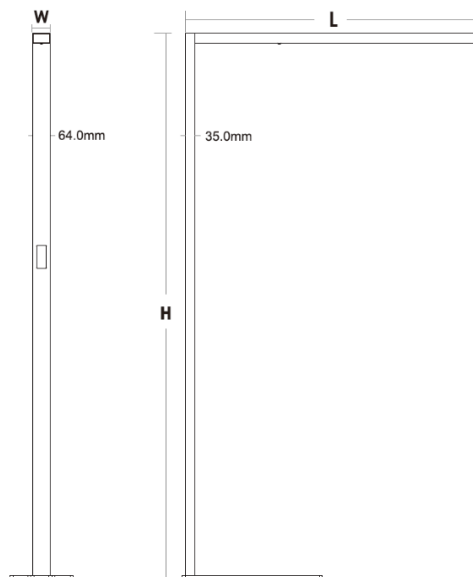

L x W x H: 1056 x 64 x 1950 mm

