




PRODUCT SPECIFICATION

MAIN MATERIAL:	Aluminium	CLASS:	CE (Class II)
RAL:	9003 (White) / 7021 (Black)	IP RATING:	20
DIMENSIONS:	1171X38X66	VOLTAGE:	Mains 230V
CABLE LENGTH:	1,5M	WORKING TEMPERATURE	-20°C ~ 45°C
NET WEIGHT:	3,2Kg	DRIVER	Longbright (included)
F MARK	Suitable for mounting on flammable materials	POWER FACTOR	≥0.9

LIGHT SOURCE:	LED STRIP (Samsung 2835)	MACADAM	Step3
LAMP INCLUDED?	YES	UGR	<6
LUMINOUS FLUX:	↑ 3250lm / 3250lm ↓	LB (on 100.000hrs)	L80B10
INPUT POWER:	↑ 25W / 25W ↓	CRI	80
COLOUR TEMP:	3000k / 4000k (see sheet below)	FLICKER FREE	YES
DIMMABLE	1-10V or DALI (see sheet below)	BEAM ANGLE	50°
PHOTOBIOLOGICAL GROUP	0 (No Risk)		

MOTION SENSOR	NO	PENDANT KIT	Included
DAYLIGHT SENSOR	NO	LINKABLE	YES
DAYLIGHT SENSOR AREA	Not applicable		(Max 10 lamps for 1 AC cable)
CONTROL	Not applicable	Warranty	5 years

MODEL	FINISH	RAL	K	DIM
PROR1001	White	9003	3000k	1-10v
PROR1002	White	9003	3000k	DALI
PROR1003	White	9003	4000k	1-10v
PROR1004	White	9003	4000k	DALI
PROR1005	Black	7021	3000k	1-10v
PROR1006	Black	7021	3000k	DALI
PROR1007	Black	7021	4000k	1-10v
PROR1008	Black	7021	4000k	DALI

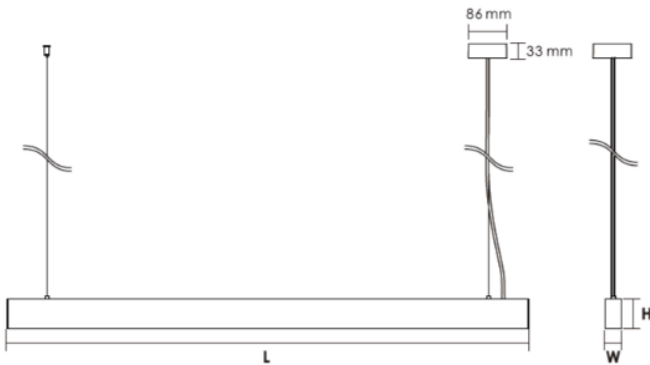

(L*W*H)mm : 1171X38X66

