




PRODUCT SPECIFICATION

MAIN MATERIAL:	Aluminium	CLASS:	CE (Class II)
RAL:	9003 (White) / 7021 (Black)	IP RATING:	20
DIMENSIONS:	1179X64X35	VOLTAGE:	Mains 230V
CABLE LENGTH:	NA	WORKING TEMPERATURE	-20°C ~ 45°C
NET WEIGHT:	3,6Kg	DRIVER	Longbright (included)
F MARK	Suitable for mounting on flammable materials	POWER FACTOR	≥0.9

LIGHT SOURCE:	LED STRIP (Samsung 2835)	MACADAM	Step3
LAMP INCLUDED?	YES	UGR	<6
LUMINOUS FLUX:	↑ 3900lm / 3900lm ↓	LB (on 100.000hrs)	L80B10
INPUT POWER:	↑ 30W / 30W ↓	CRI	80
COLOUR TEMP:	3000k / 4000k (see sheet below)	FLICKER FREE	YES
DIMMABLE	1-10V or DALI (see sheet below)	BEAM ANGLE	50°
PHOTOBIOLOGICAL GROUP	0 (No Risk)		

MOTION SENSOR	NO	PENDANT KIT	INCLUDED
DAYLIGHT SENSOR	NO	LINKABLE	NO
DAYLIGHT SENSOR AREA	Not applicable		
CONTROL	Not applicable	Warranty	5 years

MODEL	FINISH	RAL	K	DIM
PROR2011	White	9003	3000k	1-10v
PROR2012	White	9003	3000k	DALI
PROR2013	White	9003	4000k	1-10v
PROR2014	White	9003	4000k	DALI
PROR2015	Black	7021	3000k	1-10v
PROR2016	Black	7021	3000k	DALI
PROR2017	Black	7021	4000k	1-10v
PROR2018	Black	7021	4000k	DALI

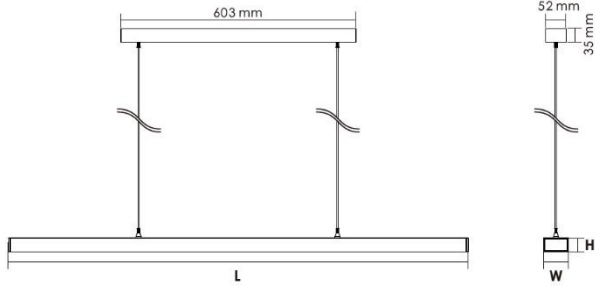

(L*W*H)mm : 1179X64X35

