



## PRODUCT SPECIFICATION

<b>MAIN MATERIAL:</b>	Aluminium	<b>CLASS:</b>	CE (Class II)
<b>RAL:</b>	9003 (White) / 7021 (Black)	<b>IP RATING:</b>	20
<b>DIMENSIONS:</b>	1172x40x80	<b>VOLTAGE:</b>	Mains 230V
<b>CABLE LENGTH:</b>	1,5M	<b>WORKING TEMPERATURE</b>	-20°C ~ 45°C
<b>NET WEIGHT:</b>	3,1Kg	<b>DRIVER</b>	Longbright (included)
<b>F MARK</b>	Suitable for mounting on flammable materials	<b>POWER FACTOR</b>	≥0.9

<b>LIGHT SOURCE:</b>	LED STRIP (Samsung 2835)	<b>MACADAM</b>	Step3
<b>LAMP INCLUDED?</b>	YES	<b>UGR</b>	<10
<b>LUMINOUS FLUX:</b>	4400	<b>LB (on 100.000hrs)</b>	L80B10
<b>INPUT POWER:</b>	40w	<b>CRI</b>	80
<b>COLOUR TEMP:</b>	3000k (see sheet below)	<b>FLICKER FREE</b>	YES
<b>DIMMABLE</b>	1-10V or DALI (see sheet below)	<b>BEAM ANGLE</b>	50°
<b>PHOTOBIOLOGICAL GROUP</b>	0 (No Risk)		

<b>MOTION SENSOR</b>	NO	<b>PENDANT KIT</b>	Included
<b>DAYLIGHT SENSOR</b>	NO	<b>LINKABLE</b>	YES
<b>DAYLIGHT SENSOR AREA</b>	Not applicable		(Max 10 lamps for 1 AC cable)
<b>CONTROL</b>	Not applicable	<b>Warranty</b>	5 years

MODEL	FINISH	RAL	K	DIM
PROR1151	White	9003	3000k	1-10v
PROR1152	White	9003	3000k	DALI
PROR1153	Black	7021	3000k	1-10v
PROR1154	Black	7021	3000k	DALI

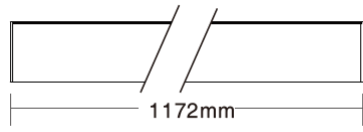

(L\*W\*H)mm : 1172x40x80

